



NANO AP Series


400VA / 600VA / 800VA



Features

- Offline UPS
- Compact size with stand and mounting flexibility
- Excellent microprocessor control guarantees high reliability
- Auto restart while AC is recovering
- Simulated sine wave
- Cold start function
- Full protection: Discharge, overcharge, short circuit, and thermal protection

Product Overview

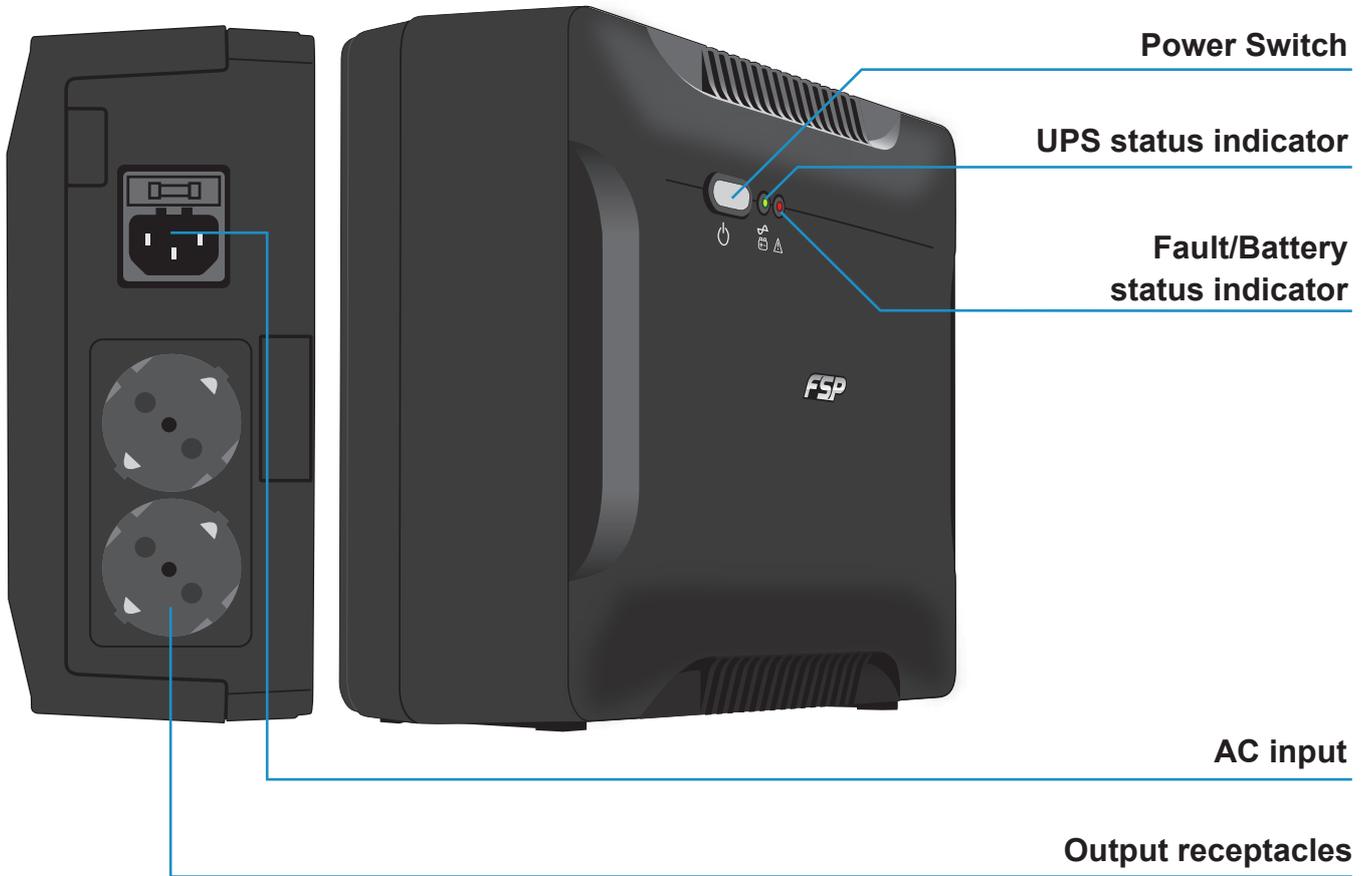

Specifications



MODEL	NANO-AP 400	NANO-AP 600	NANO-AP 800
CAPACITY	400 VA / 240 W	600 VA / 360 W	800 VA / 480 W
INPUT			
Voltage	110/120 VAC or 220/230/240 VAC		
Voltage Range	90-145 VAC / 180-270 VAC		
Frequency Range	60/50 Hz (auto sensing)		
OUTPUT			
Voltage	110/120 VAC or 220/230/240 VAC		
AC Voltage Regulation (Batt. Mode)	±10%		
Frequency Range (Batt. Mode)	60 Hz or 50 Hz ±1 Hz		
Transfer Time	Typical 2 ~ 6 ms,		
Waveform (Batt. Mode)	Simulated Sinewave		
BATTERY			
Battery Type & Number	12 V/4.5 Ah	12 V/7.5 Ah	12 V/9 Ah
Typical Recharge Time	8 hours up to 90% capacity		
PROTECTION			
Full Protection	Overload, discharge, and overcharge protection		



NANO AP Series

400VA / 600VA / 800VA

Package Information

Model	NANO-AP 400	NANO-AP 400	NANO-AP 400
EAN Code	-	471114048140 1	471114048478 5
UPC Code	-	-	-
Shipping Weight	2.2 kg	2.7 kg	3.1 kg
Shipping Dimensions (L×W×H)	228 x 82.5 x 207mm	228 x 82.5 x 207mm	228 x 82.5 x 207mm
Master Pack Weight	2.2 kg	2.7 kg	3.1 kg
Master Pack Dimension (L×W×H)	228 x 82.5 x 207mm	228 x 82.5 x 207mm	228 x 82.5 x 207mm
Master Pack Quantity	1pcs	1pcs	1pcs
Pallet Quantity	1pcs	1pcs	1pcs
Country of Origin	China	China	China